


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS
  - 1.1 FREQUENCY RANGE: DC to 4.0 GHz
  - 1.2 VSWR (MAX):
    - DC to 2.0 GHz: 1.15:1
    - 2.0 to 4.0 GHz: 1.25:1
  - 1.3 MAXIMUM INPUT POWER:
    - 0.5 WATTS MAX AT +25°C
  - 1.4 IMPEDANCE: 50 OHMS
  - 1.5 TEMPERATURE RANGE:
    - 65°C to +125°C

2.0 MARKING: MARK UNIT AS SHOWN  
(REF.: INK-02638-27-21)

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

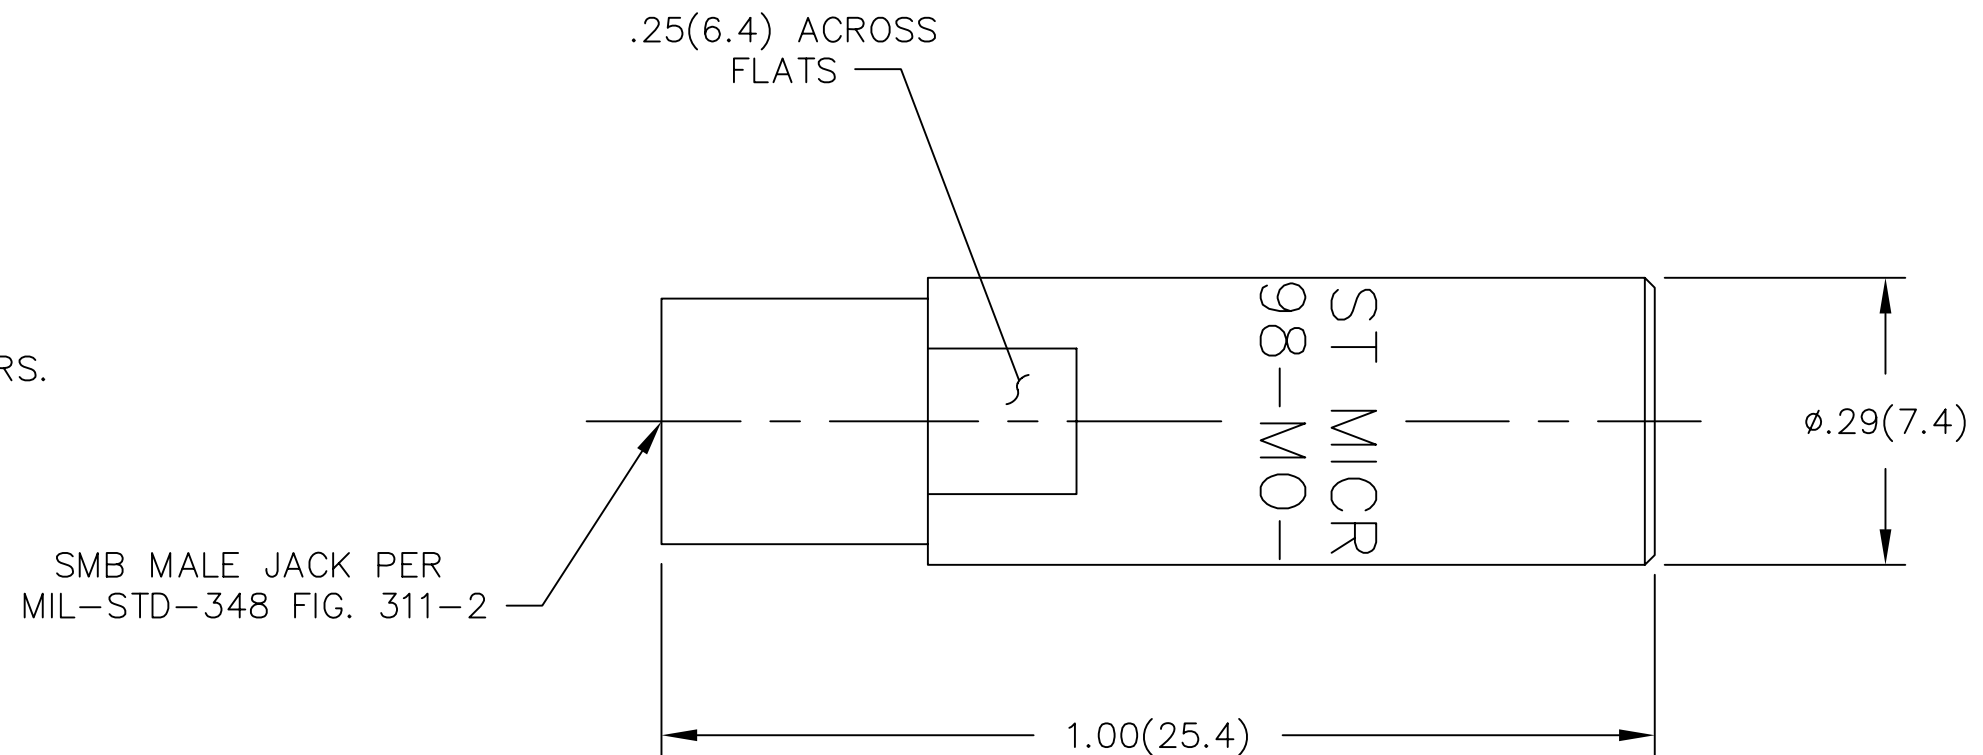

REV.	DESCRIPTION	DATE
-	RELEASED	3/24/96
-1	ADDED TITLEBLOCK	11/14/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	FSCM NO. <b>34078</b>	<b>MIDWEST MICROWAVE</b>		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION SMB MALE JACK	
	DRAWN/DATE A.BEATTY 2/27/96	ENG./DATE P.GOODMAN 3/21/96	DRAWING NUMBER TRM-2198-MO-SMB-02	
	CHECKED/DATE M.STAFFORD 3/13/96	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1