



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MINIMUM BUNDLE DIAMETER	MAXIMUM BUNDLE DIAMETER	PACKAGE QUANTITY	LENGTH = "L" ±.3 [7]
MLT2.7WLH-LP316	2.0" [51]	2.7" [69]	50	10.2" [259]
MLT4WLH-LP316	2.0" [51]	4.0" [102]	50	14.3" [362]
MLT6WLH-LP316	2.0" [51]	6.0" [152]	50	20.5" [521]
MLT8WLH-LP316	2.0" [51]	8.0" [203]	50	26.8" [679]

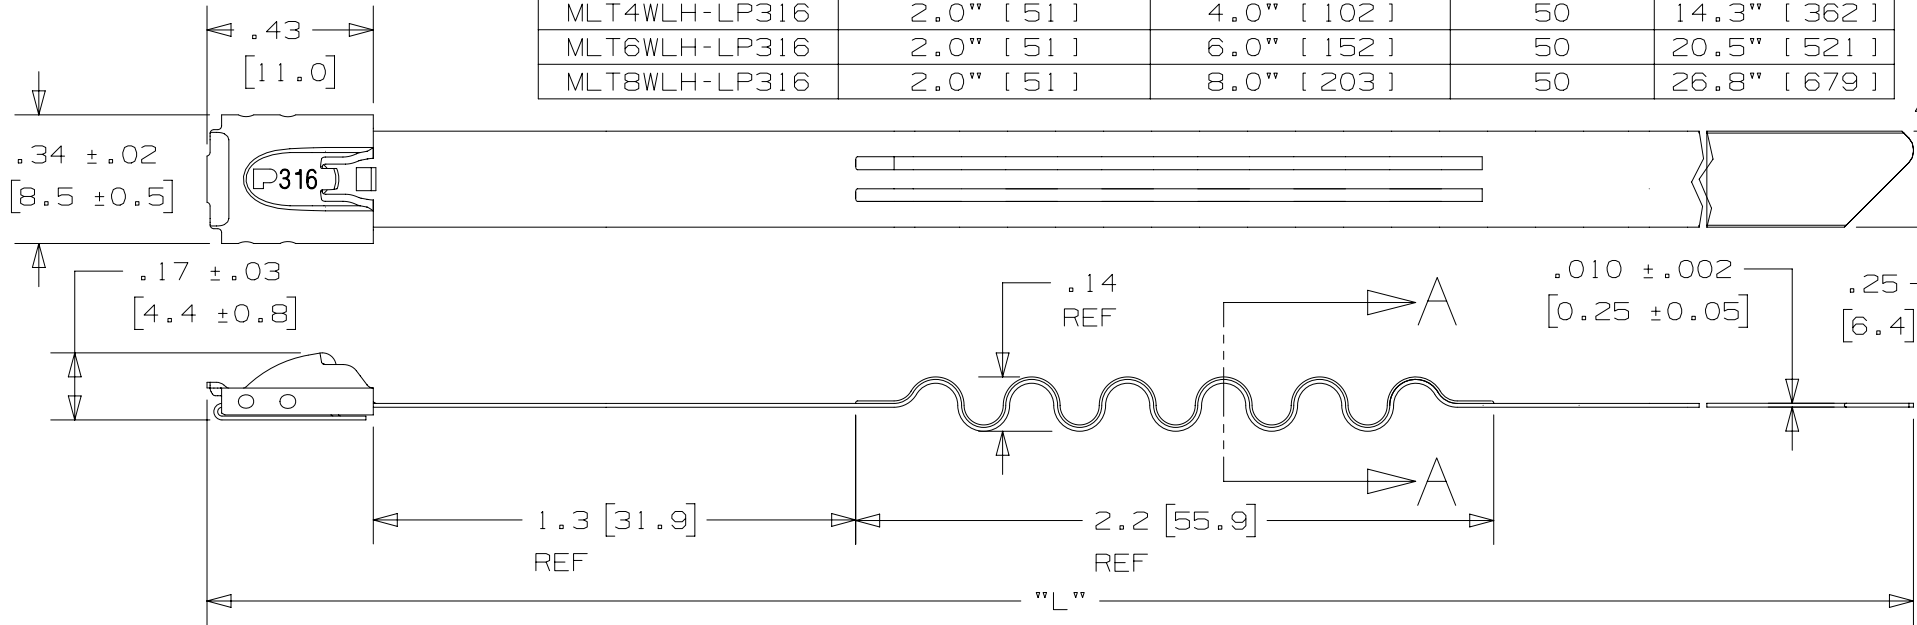

NOTES:

1. APPLICATION TOOLS - PPTMT, GS4MT, ST2MT, ST3MT, AND HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 250 LBS. (1112 NEWTONS) WHEN TESTED ON A 3" MANDREL. PART NO. MLT2.7WLH-LP316 TESTED ON A 1 1/2" MANDREL.
3. [] DENOTES DIMENSION IN MILLIMETERS.
4. TOLERANCES: .XXX = ±.010 [.25]
 .XX = ±.02 [.5]
 .X = ±.03 [.8]
 ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

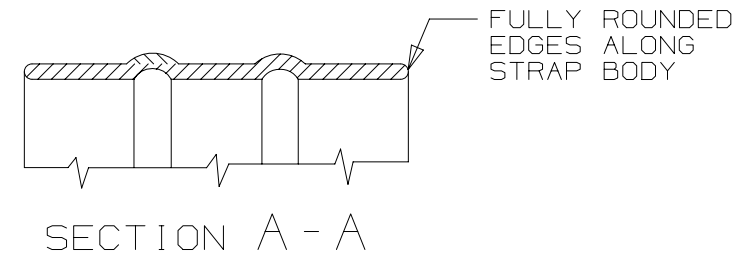

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
6	10.02.15	BDK	SKB	RGRO	H. CHANGED BODY TIP CONFIGURATION	N41138BS_DC

TITLE						WAVE-TY LIGHT-HEAVY					
CONTROL DRAWING						ITEM REVISION NAME					
N41138BS/06						DATASET FILE NAME					
N41138BS/06						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					
.x ± .1 [2.54]						.xxx ± .005 [.127]					
.xx ± .01 [.25]						ANGLES ± 5 °					
DRAWN BY						THIRD ANGLE PROJECTION					
JAMB						DATE					
03/03						CHK					
DPN						SCALE					
2:1						MATERIAL:					
316 STAINLESS STEEL						DRAWING NUMBER:					
N41138BS_DC						SHT 1 OF 1					
SIZE						A					