


NOTES:

- 1.0 MATERIALS:
 - 1.1 HOUSING: STAINLESS STEEL PER ASTM-A582, TYPE 303.
 - 1.2 CENTER CONTACT: BERYLLIUM COPPER ROD ALLOY C172, PER ASTM-B196.
 - 1.3 DIELECTRIC: PTFE FLUOROCARBON PER ASTM-D1710.
- 2.0 PLATING:
 - 2.1 HOUSING: PASSIVATED PER MIL-F-14072 AND SAE AMS QQ-P-35.
 - 2.2 CENTER CONTACT: GOLD PER MIL-PRF-39012.
 - 2.3 FERRULE: GOLD PER MIL-PRF-39012.
- 3.0 ELECTRICAL:
 - 3.1 FREQUENCY: DC-18.0 GHz
 - 3.2 VSWR: 1.06 DC-4.0 GHz
1.10 4.0-8.0 GHz
 - 3.3 IMPEDANCE: 50 OHMS
- 4.0 MECHANICAL:
 - 4.1 INTERFACE PER MIL-STD-348A, FIG. 317-2 IN ACCORDANCE WITH MIL-PRF-39012.
 - 4.2 CENTER CONTACT CAPTURED IN ACCORDANCE WITH MIL-PRF-39012.
- 5.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

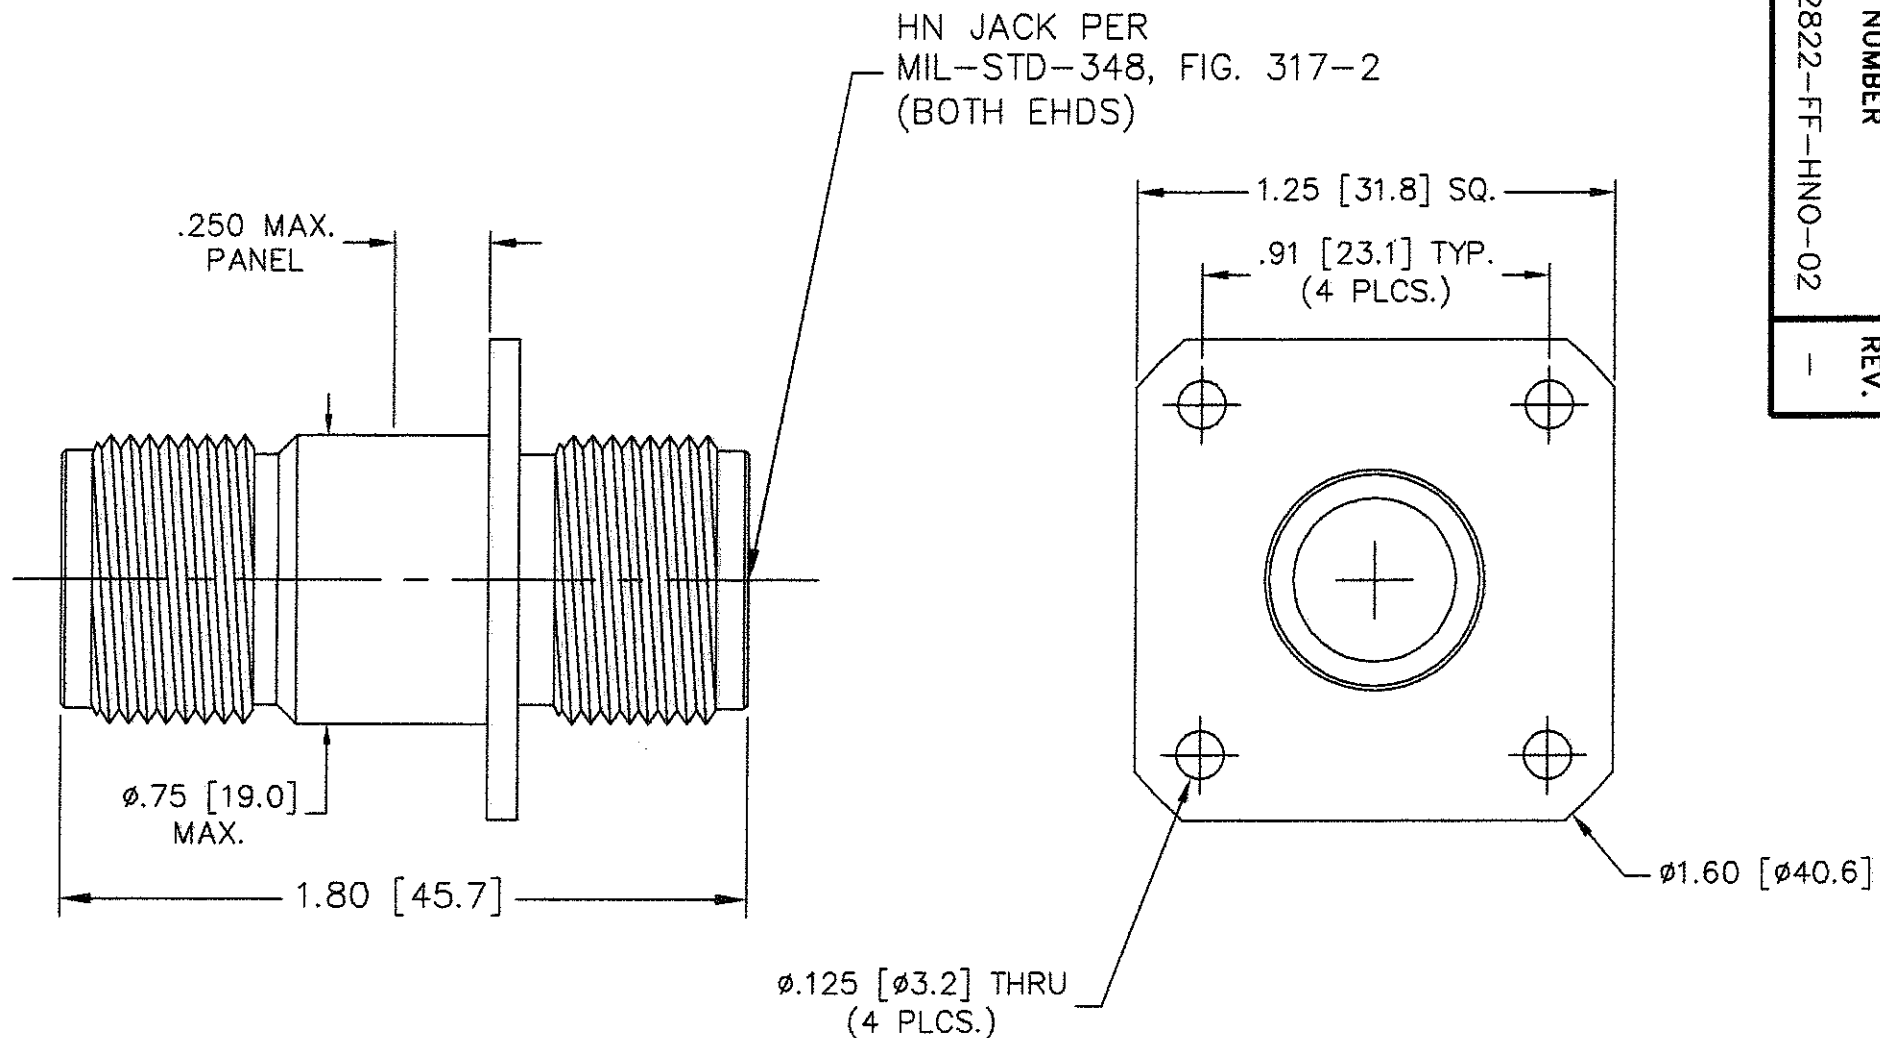

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FSCM NO. 34078		MIDWEST MICROWAVE	
3 PLACE DECIMALS ±.005		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE ADAPTER - HN JACK TO HN JACK FLANGE MOUNT	
2 PLACE DECIMALS ±.02					
FRACTIONS ±1/64		DRAWN/DATE S. ORLOV 5/7/08		DRAWING NUMBER ADT-2822-FF-HNO-02	
PARALLELITY: T.I.R. _____		ENGR/DATE S. ORLOV 5-7-08		APPROVED/DATE	
FLATNESS: T.I.R. _____		CHECKED/DATE		SCALE: 2=1	
CONCENTRICITY: T.I.R. _____		APPROVED/DATE		SHEET 1 of 1	
ANGLES AND PERPENDICULARITY: ±1'					

DATE	5-7-08
DESCRIPTION	RELEASED
REV.	-