

## NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 10 WATTS AVG. AT +40°C DERATED LINEARLY TO 1 WATT AT +125°C
- 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 MAXIMUM VSWR: 1.05 + 0.01f(GHz)
- 2.0 MARKING: MARK UNIT AS SHOWN. (REF.: INK-01526-27-07)
- 3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

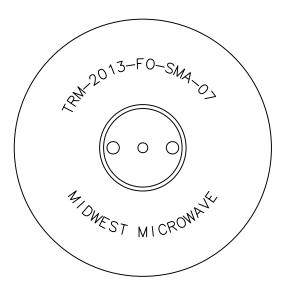

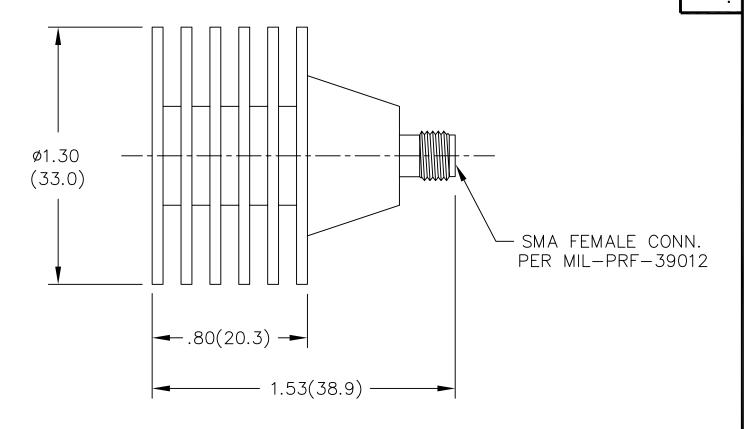

MODEL NUMBER

TRM-2013-F0-SMA-07

REV.	DESCRIPTION	DATE
_	RELEASED	3/25/92
Α	ECN 15506	9/23/96
A1	ADDED TITLEBLOCK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS	34078	MIDW	EST	MIC	R0	WA	V	$\overline{E}$
ARE IN INCHES AND TOLERANCES ARE:	NOTICE: The	information	TITLE					
3 PLACE DECIMALS ±.005	drawing is	proprietary	TERMINATION					
2 PLACE DECIMALS ±.02	and must r							
FRACTIONS ±1/64	without the of Midwest							
PARALLELITY: T.I.R	DRAWN/DATE	ENC /DATE						
FLATNESS: T.I.R	A.BEATTY 3/17/92	eng./date G.KOZAK 3/25/92	TRM-2013-F0-SMA-07					
CONCENTRICITY: T.I.R	CHECKED/DATE	APPROVED/DATE						
ANGLES AND PERPENDICULARITY: ±1°			SCALE: 2	2=1	SHEET	1	of	1