



FIBERGLASS BASE STATION ANTENNAS FEATURE INDUSTRY LEADING DESIGN COMPONENTS THAT PERFORM IN EXTREME CONDITIONS

The FG16397 quad-band omnidirectional base station antenna incorporates a collinear design that is enclosed in high density fiberglass, which is covered with a protective ultraviolet inhibiting coating. The radiating elements are made from high efficiency copper and are carefully phased to provide maximum gain in the horizontal plane. The mounting sleeves are tuned to eliminate RF currents from the transmission line, resulting in a "cold" sleeve that allows for greater freedom in mounting. The antenna's high quality and well-focused beam provides the best efficiency with highest gain.

FEATURES

- Quad-band
- Every FG fiberglass base antenna is tested on a network analyzer before shipping to assure the best performance
- Special UV Treated - Stands up to the sun
- Durable gold anodized sleeve and cap with N-female connector
- FedEx/UPS Shippable

MARKETS

- Omnidirectional outdoor antenna applications used in commercial, public safety, and government applications around the globe
- Typical applications include land based and marine radio and voice and data transmission
- The quad-band feature allows the antenna to be used in many diverse applications

ELECTRICAL SPECIFICATIONS

Frequency Range	806-896 MHz	890-960 MHz	1850-1990 MHz	2400-2500 MHz
Peak Gain	2 dBi	1 dBi	3.3 dBi	2 dBi
Elevation Beamwidth at Half-Power	110°	90°	60°	70°
Azimuth Beamwidth at Half-Power	360°	360°	360°	360°

MECHANICAL SPECIFICATIONS

	All data relevant to all frequencies
Maximum Power	100 Watts
Nominal Impedance	50Ω
Polarization	Vertical
VSWR	≤ 2.0:1
Termination	N-Female Connector
Mounting Bracket	Optional p/n: FM2SP Mounting Kit
Lightning Protection	Lightning Arrestor p/n: LABH350NN (sold separately)
Antenna Length	14" (35.56cm)
Weight (Mass)	0.844 lbs
Diameter	1.310" (33.27mm)
Rated Wind Velocity	125mph (210kph)
Rated Wind Velocity (with 1/2" (12.7mm) radial ice)	85mph (137kph)
Wind Resistance	0.1245 sq. ft

global solutions: local support.™


Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

PATTERNS

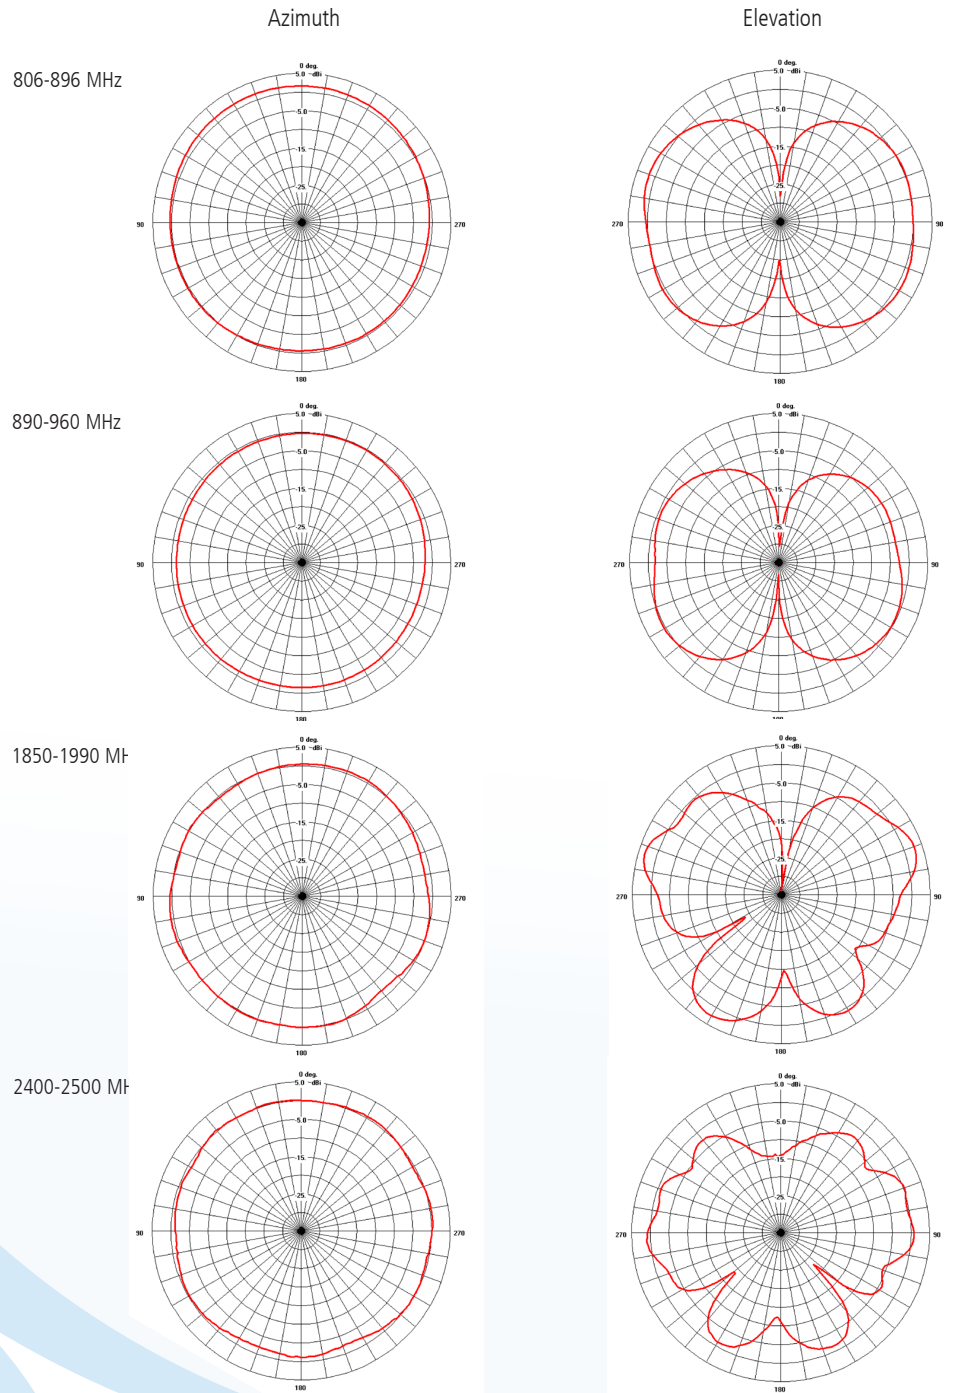

ANT-DS-FG16397 0510

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.