## IEC Appliance Outlet D, Screw-on Mounting, Front Side, Solder Terminal







**Description** - Panel Mount :

Screw-on mounting, Front Side

- Connector , Pin temperature 70 °C , Protection class II
- For coupling with cable connector type C
- Solder terminal

## **Approvals**

- VDE Certificate Number: 40034348

- UL File Number: E45115 - CSA File Number: 27324











# Weblinks


pdf datasheet, html-datasheet, General Product Information, RoHS, CHINA-RoHS, REACH, Distributor-Stock-Check, Accessories, Detailed request for product

## **Technical Data**

Ratings IEC	2.5 A / 250 VAC; 50 Hz		
Ratings UL/CSA	4A / 250 VAC; 60 Hz		
Dielectric Strength	> 4 kVAC between L-N		
	> 2 kVAC between L/N-PE		
	(1 min/50 Hz)		
Allowable Operation Tempe-	-25 °C to 70 °C		
rature			
IP-Protection	from front side IP 20 acc. to IEC 60529		
Insulation cover	Suitable for appliances with protection		
	class II acc. to IEC 61140		
Material: Housing	PA6, black or grey, UL 94V-0		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in General Product Information

### **Dimensions**

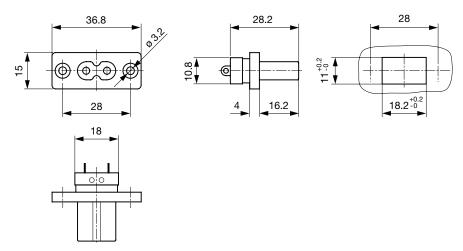


Length of the terminal please find at the order code configuration table

## Config. Code

## 5084 - H - A B C 0- D - E O

The characters are placeholders for the correspondingly keys of selections from the key tables.

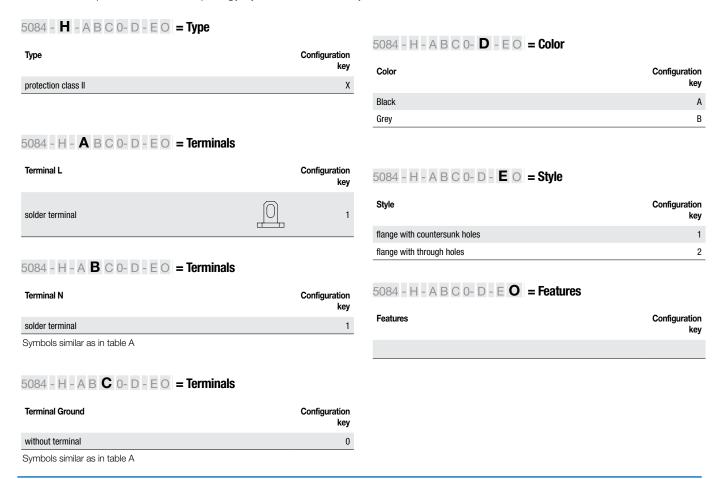

#### **All Variants**

Terminals L / N	Color	Style	Config. Code	Order Number
solder terminal	Black	flange with countersunk holes	5084-X-1100-A-1	6180.0004
solder terminal	Black	flange with through holes	5084-X-1100-A-2	6180.0005

The listet variants should be available from stock Other versions on request www.schurter.com/contact

Availability for all products can be searched real-time: http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit 50 Pcs