


3X 22 GAUGE CONDUCTORS PER MIL-W-22759/11 WITH FUSED TFE WRAPPED OVER BRAIDED SHIELD (COMMON - BLACK, NORMALLY CLOSED - WHITE, NORMALLY OPEN - RED, SHIELDING GROUNDED TO HOUSING)

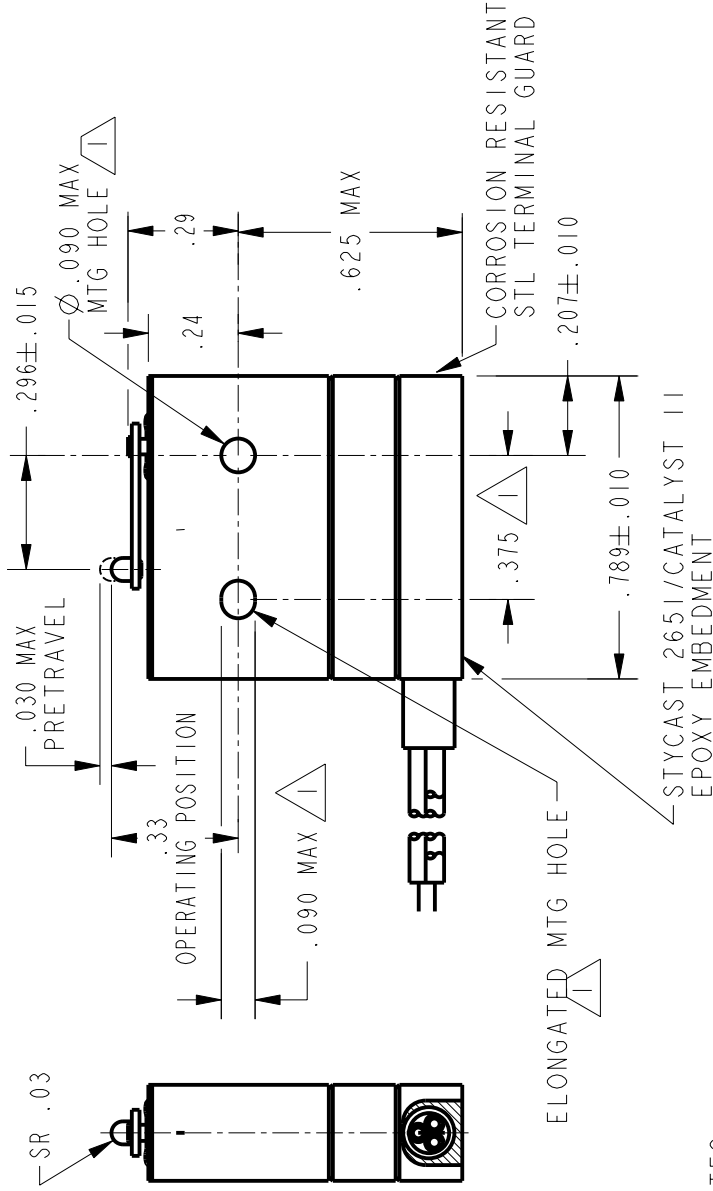

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\varnothing .087$ MAX ON $.375 \pm .002$ CENTERS
- 2 - FOR USE IN TEMPERATURE RANGE -85°F TO $+257^{\circ}\text{F}$
- 3 - HERMETICALLY SEALED (METAL-TO-METAL, GLASS-TO-METAL)
- 4 - ALL EXPOSED PARTS ARE OF CORROSION RESISTANT MATERIALS
- 5 WEIGHT OF SWITCH ONLY IS 0.25 OZ MAX. WEIGHT OF CONDUCTOR GROUP 3.5 OZ
- 6 DO NOT APPLY MORE THAN 1 1/2 INCH LBS OF TORQUE WHEN TIGHTENING MOUNTING SCREWS
- 7 - 24K GOLD MOVABLE CONTACT, GOLD ALLOY STATIONARY CONTACTS
ANSI Y14.5M-1982 APPLIES

STYCAST 2651/CATALYST 11
EPOXY EMBEDMENT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		THIRD ANGLE PROJECTION	
ELECTRICAL DATA		SCALE 2 : 1	DO NOT SCALE PRINT
CONTACT ARRANGEMENT S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
28 VOLTS DC RATING		ONE PLACE (.0)	±.030
INDUCTIVE-----SEA LEVEL-1/4 AMP		TWO PLACE (.00)	±.015
RESISTIVE-----SEA LEVEL-1/2 AMP		THREE PLACE (.000)	±.005
70,000 FT-1/4 AMP		ANGLES	±
70,000 FT-1/2 AMP		WEIGHT	5

CHARACTERISTICS

OPERATING FORCE	7 OZ MAX
RELEASE FORCE	1 OZ MIN
DIFFERENTIAL FORCE	.006 MAX
OVERTRAVEL	.003 MIN

10HM26-10	CATALOG LISTING
PAGE 1 OF 1	REPLACES
RELEASE NO. PR-24138	

1 ISSUE	3
---------	---

REVISIONS	CHECK
A PR24138	
TSM 14JUL99	
B C095473	
TSM 19AUG99	

CHECK	14JUL99
CHECK	JAF
CHECK	14JUL99
CHECK	JAF

TSM	14JUL99
PTC/CAD	20
DRAWN	