



RECOMMENDED PANEL CUTOUT



CIRCUIT: SPDT

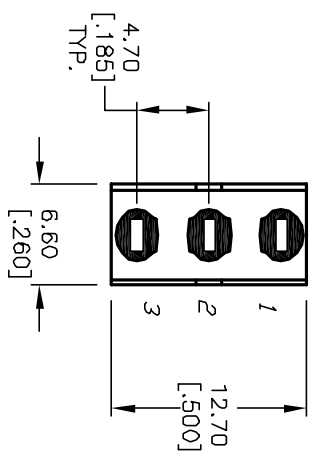

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERM NOS. FOR REF. ONLY
 4. RATING: 5A @120VAC or 28VDC: 2A @250VAC
 5. CONTACT MATERIAL: Copper Alloy w/Silver plate
 6. ELECTRICAL LIFE: 30,000 ACTUATIONS @Full Load
 7. INSULATION RESISTANCE: 1000 Mega Ohms min.
 8. DIELECTRIC STRENGTH: 1000V RMS @SEA LEVEL.
 9. OPERATING TEMPERATURE: -30°C TO 85°C

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	DN	DN
DN	NONE	DN
2-1	DPEN	2-3

E-SWITCH®

REV.	ECN No.	REVISION AND REDRAWN	DATE	CHKD	SCALE	DATE	DR	DWG	REV
B	12100	REVISED AND REDRAWN	4/29/02	CJB	2:1	4/29/02	CJB	TS13003	B
DESCRIPTION					TITLE				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					500 SSP-1 S3 M1 Q E B				