


# SXN15 Series

Dual positive output

- Two positive outputs
- Output voltage tracking
- High efficiency
- Approved to EN60950, UL/cUL1950
- Wide operating temperature up to and exceeding 65°C (natural convection)
- Up to 100% load imbalance
- Trim function
- No minimum load
- Complies with ETS 300 019-1-3/2-3
- Fully compliant with ETS 300 386-1

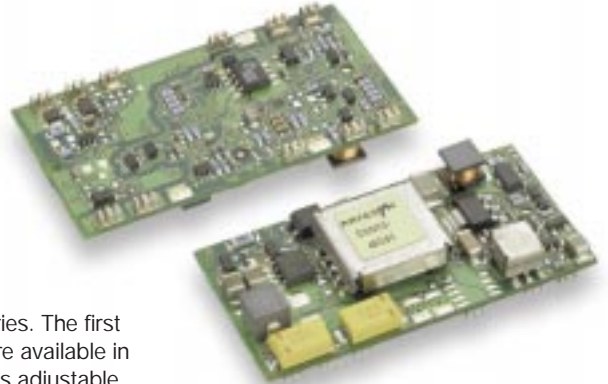

The SXN15 is a new high efficiency open frame isolated 15 Watt converter series. The first two models in the series feature an input voltage range of 33 to 75VDC and are available in output voltages of 5V/3.3V and 3.3V/2.5V. The output voltage on each model is adjustable from 90% to 110% of the nominal value. Typical efficiencies for the models are 86% for the 5V/3.3V and 85% for the 3.3V/2.5V version. The SXN15 series also has a remote on/off capability with active high or active low logic. Overcurrent and overvoltage protection features are included as standard. With full international safety approval including EN60950 and cUL1950, the SXN15 reduces compliance costs and time to market.



2 YEAR WARRANTY

All specifications are typical at nominal input, full load at 25°C unless otherwise stated

## SPECIFICATIONS

### OUTPUT SPECIFICATIONS

Voltage adjustability	Both outputs	±10% min.
Voltage setpoint	Both outputs	±2% typ.
Voltage accuracy (See Note 8)	Both outputs	±4% max.
Output voltage (Over all line and load conditions)	5V/3.3V	4.931V < V <sub>o1</sub> < 5.133V 3.236V < V <sub>o2</sub> < 3.368V
	3.3V/2.5V	3.297V < V <sub>o1</sub> < 3.431V 2.431V < V <sub>o2</sub> < 2.531V
Minimum load		0%
Ripple and noise 20MHz bandwidth		140mV pk-pk max. 50mV rms max.
Transient response 50% to 75% to 50%	D05-3V3, V <sub>o1</sub>	180mV max.
	D05-3V3, V <sub>o2</sub>	100mV max.
	D3V3-2V5, V <sub>o1</sub>	150mV max.
	D3V3-2V5, V <sub>o2</sub>	100mV max.
Peak dev. settling time	To 1.0%, no external cap.	100µs
Short circuit protection (I <sub>sc</sub> )	10A rms	Continuous automatic recovery
Tracking		Max. differential 0.7V during start-up

### INPUT SPECIFICATIONS

Input voltage range	48Vin nominal	33 to 75VDC
Input current	No load	35mA max.
	Remote OFF	25mA max.
UVLO turn ON voltage		33V (typ)
UVLO turn OFF voltage		30V (typ)
Active high remote ON/OFF Logic compatibility		(See Note 4) Open collector ref. to -input ON Open circuit or >2VDC OFF <1.2VDC
Start-up time	Nominal line	2.5ms (typ)

### EMC CHARACTERISTICS

ETS 300 386-1 table 5		
Conducted emissions	EN55022 (See Note 6)	Level A
	EN55022 (See Note 6)	Level B
Radiated emissions	EN55022 (See Longform Data Sheet) Level B	
Immunity:		
ESD air	EN61000-4-2	8kV, 15kV
ESD contact	EN61000-4-2	6kV, 8kV
EFT DC power	EN61000-4-4	2kV, 4kV
EFT signal	EN61000-4-4	1kV, 2kV
Radiated field enclosure	EN61000-4-3	10V/m
Surges indoor signal	EN61000-4-5	500V
Conducted (DC power)	EN61000-4-6	10V
Conducted (signal)	EN61000-4-6	10V (See Note 7)
Input transients	ETS 300 132-2, ETR 283	

### GENERAL SPECIFICATIONS

Efficiency		See table
Operational insulation	Input/output	1500VDC
Input fuse		2.0A slow blow
Switching frequency	Fixed	265kHz
Approvals and standards (See Notes 1, 2 and 3)		UL/cUL1950, EN60950 TÜV Rheinland
Weight		12g (0.42oz)
MTBF	MIL-HDBK-217F	>600,000 hours
Representative model:	48S05 @ 48Vin, 40°C, 100% load ground benign BELLCORE 332	>1,500,000 hours

### ENVIRONMENTAL SPECIFICATIONS

Thermal performance (See Note 5)	Operating ambient temperature	-40°C to +65°C
	Non-operating	-40°C to +120°C

# SXN15 Series

Dual positive output

DC/DC CONVERTERS | 15W High Efficiency DC/DC Converters

2

For the most current data and application support visit [www.artesyn.com/powergroup/products.htm](http://www.artesyn.com/powergroup/products.htm)

INPUT VOLTAGE	OUTPUT VOLTAGE		OUTPUT CURRENT		OVP		TYPICAL EFFICIENCY	MODEL NUMBER <sup>(4)</sup>
	1	2	1	2	1	2		
33-75VDC	5V	3.3V	3.0A	4.5A	6.2V	4.2V	86%	SXN15-48D05-3V3
33-75VDC	3.3V	2.5V	3.5A	4.5A	4.0V	3.0V	85%	SXN15-48D3V3-2V5

## Notes

- 1 User must provide recommended fuses in order to comply with safety approvals.
- 2 Maximum continuous output power.  
15 Watts for D05-3V3 model.  
11.55 Watts for D3V3-2V5 model.
- 3 Maximum temperature on hot spots not to exceed 115°C.  
Refer to Longform data sheet for details.
- 4 Active low remote on/off is available. Standard product is active high. Designate with the suffix '-R', e.g. SXN15-48D05-3V3-R.
- 5 Operating ambient temperatures are specified at natural convection. Higher operating temperatures are possible with increased airflow. See Application Note 116 for further details.
- 6 Measured with external filter. See Application Note 116 for further details.
- 7 Signal line assumed < 3m in length.
- 8 This parameter is calculated at worst case line, load, temperature and initial conditions.


PIN CONNECTIONS	
PIN NUMBER	FEATURE
1	V <sub>o1</sub> +
2	Com
3	V <sub>o2</sub> +
4	Trim
5	N/C
6	N/C
7	N/C
8	On/Off
9	N/C
10	V <sub>in</sub> -
11	V <sub>in</sub> +

**CAUTION: Hazardous internal voltages and high temperatures. Ensure that unit is not user accessible.**

## International Safety Standard Approvals

**UL** US UL/cUL 1950 3rd edition. File No. E135734

**TÜV** TÜV Rheinland. Certificate No. R2074133

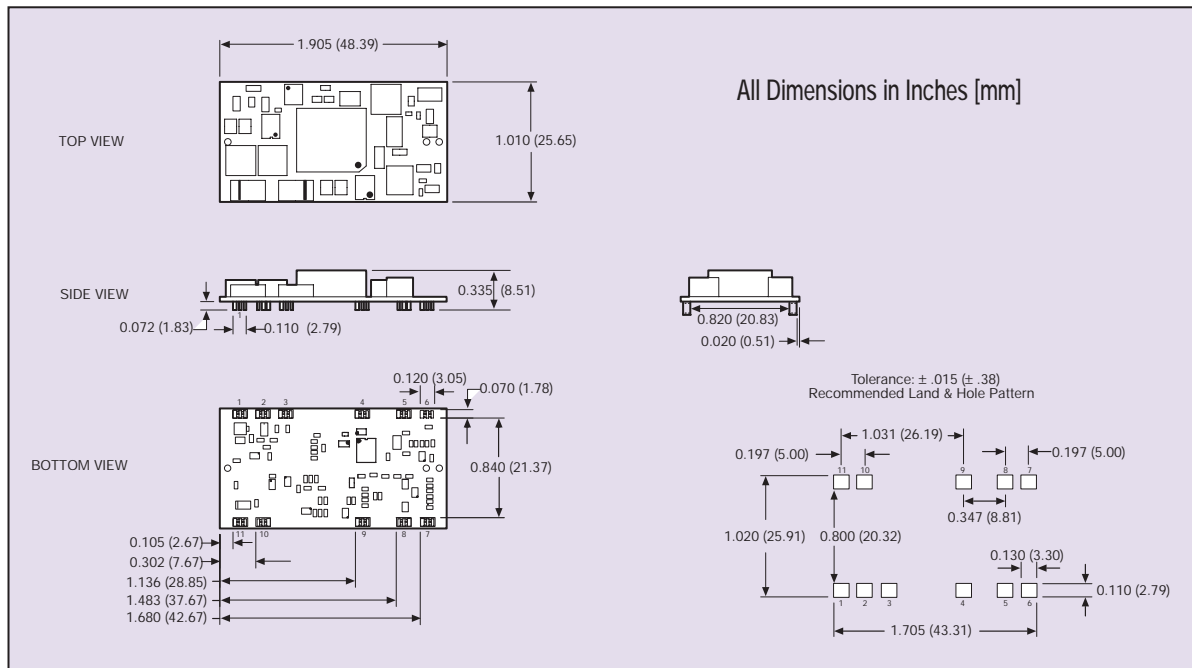

Data Sheet © Artesyn Technologies® 2002

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Please consult our website for the following items: ✓ Application Note ✓ Longform Data Sheet

[www.artesyn.com](http://www.artesyn.com)