


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS
 - 1.1 FREQUENCY RANGE: DC to 4.0 GHz.
 - 1.2 MAX. INPUT POWER:
 - 2 WATTS AVERAGE AT +25°C DERATED
 - LINEARLY TO 0.5 WATTS AT +125°C.
 - 1.3 OPERATING TEMP. RANGE: -54°C to +125°C.
 - 1.4 IMPEDANCE: 50 OHMS.
 - 1.5 VSWR (MAX.): 1.20:1
 - 1.6 PEAK POWER:
 - 0.25 KILOWATT (5 MICROSECOND PULSE WIDTH).
- 2.0 MARKING
 - 2.1 MARK UNIT AS SHOWN:
 - (REF: INK-02638-27-02)
- 3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

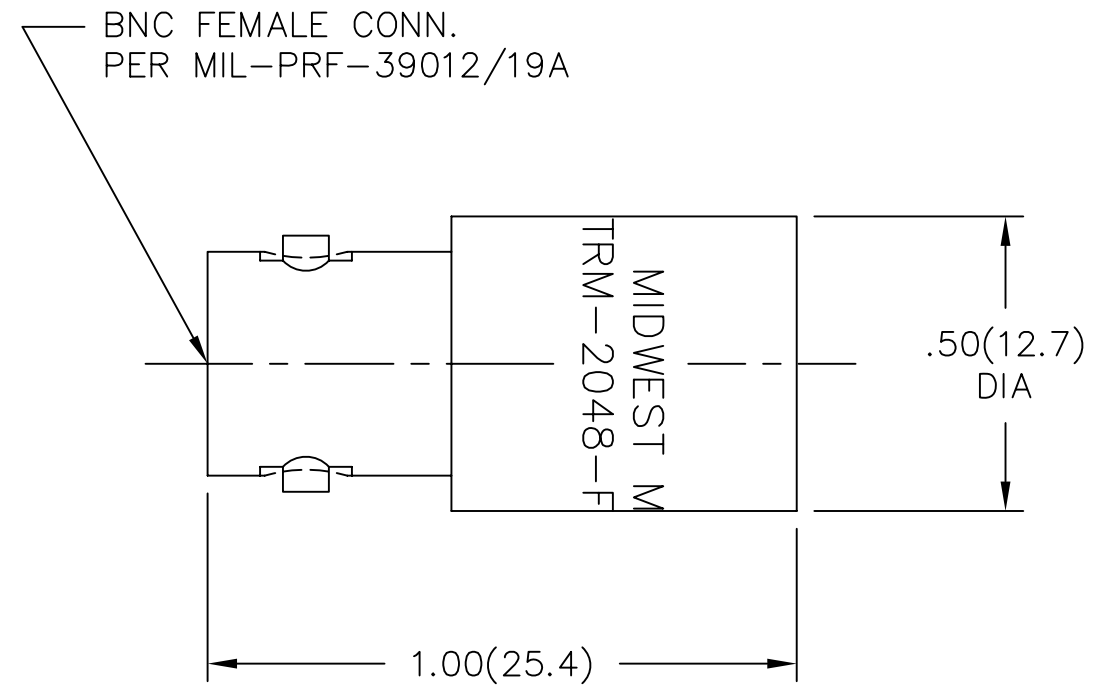

DWG. NO. WAS: 05997-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/20/93
A	ECR 6545	8/1/89
B	ECN 12414	2/9/93
B1	ADDED TITLEBLOCK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°	FSCM NO. 34078	MIDWEST MICROWAVE	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	TITLE TERMINATION BNC FEMALE	
	DRAWN/DATE M.HOLLMAN 2/9/93	ENG./DATE G.KOZAK 2/19/93	DRAWING NUMBER TRM-2048-FO-BNC-10
	CHECKED/DATE A.BEATTY 2/17/93	APPROVED/DATE	SCALE: 3=1 SHEET 1 of 1