



**RoHS compliant**  
**1310 nm Multi-mode Transceiver (2km)**  
**Small Form Pluggable (SFP), 3.3V**  
**155 Mbps ATM/125 Mbps Fast Ethernet**



### Features

- RoHS compliant
- Compliant with Fast Ethernet standard
- Industry standard small form pluggable (SFP) package
- Duplex LC connector
- Differential LVPECL inputs and outputs
- Single power supply 3.3V
- TTL signal detect indicator
- Hot Pluggable
- Class 1 laser product complies with EN 60825-1

### Application

- Distributed multi-processing
- Switch to switch interface
- High speed I/O for file server
- Bus extension application
- Channel extender, data storage

### Ordering Information

PART NUMBER	INPUT/OUTPUT	SIGNAL DETECT	VOLTAGE	TEMPERATURE
LM38-A3S-TC-N	AC/AC	TTL	3.3V	-10°C to 70°C
LM38-A3S-TI-N	AC/AC	TTL	3.3V	-40°C to 85°C

### Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Storage Temperature	$T_s$	-40	85	°C	
Supply Voltage	$V_{cc}$	-0.5	4.0	V	
Input Voltage	$V_{IN}$	-0.5	$V_{cc}$	V	
Output Current	$I_o$	---	50	mA	
Operating Current	$I_{OP}$	---	400	mA	



RoHS compliant  
1310 nm Multi-mode Transceiver (2km)  
Small Form Pluggable (SFP), 3.3V  
155 Mbps ATM/125 Mbps Fast Ethernet

### Recommended Operating Conditions

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTE
Case Operating Temperature	$T_C$	-10 -40	70 85	°C	LM38-A3S-TC-N LM38-A3S-TI-N
Supply Voltage	$V_{CC}$	3.1	3.5	V	
Supply Current	$I_{TX} + I_{RX}$	---	300	mA	

### Transmitter Electro-optical Characteristics

$V_{CC} = 3.1\text{ V to }3.5\text{ V}$ ,  $T_C = -10\text{ °C to }70\text{ °C}$  ( $-40\text{ °C to }85\text{ °C}$ )

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Data Rate	$B$	10	155	200	Mb/s	
Output Optical Power 62.5/125 $\mu\text{m}$ fiber	$P_{out}$	-20	---	-14	dBm	Average
Output Optical Power 50/125 $\mu\text{m}$ fiber	$P_{out}$	-23.5	---	-14	dBm	Average
Extinction Ratio	$ER$	10	---	---	dB	
Center Wavelength	$\lambda_C$	1270	1310	1380	nm	
Spectral Width (FWHM)	$\Delta\lambda$		Fig 1		nm	
Rise/Fall Time (10–90%)	$T_{r,f}$	---	---	3	ns	
Differential Input Voltage	$V_{DIFF}$	0.4	---	2.0	V	



RoHS compliant  
1310 nm Multi-mode Transceiver (2km)  
Small Form Pluggable (SFP), 3.3V  
155 Mbps ATM/125 Mbps Fast Ethernet

---

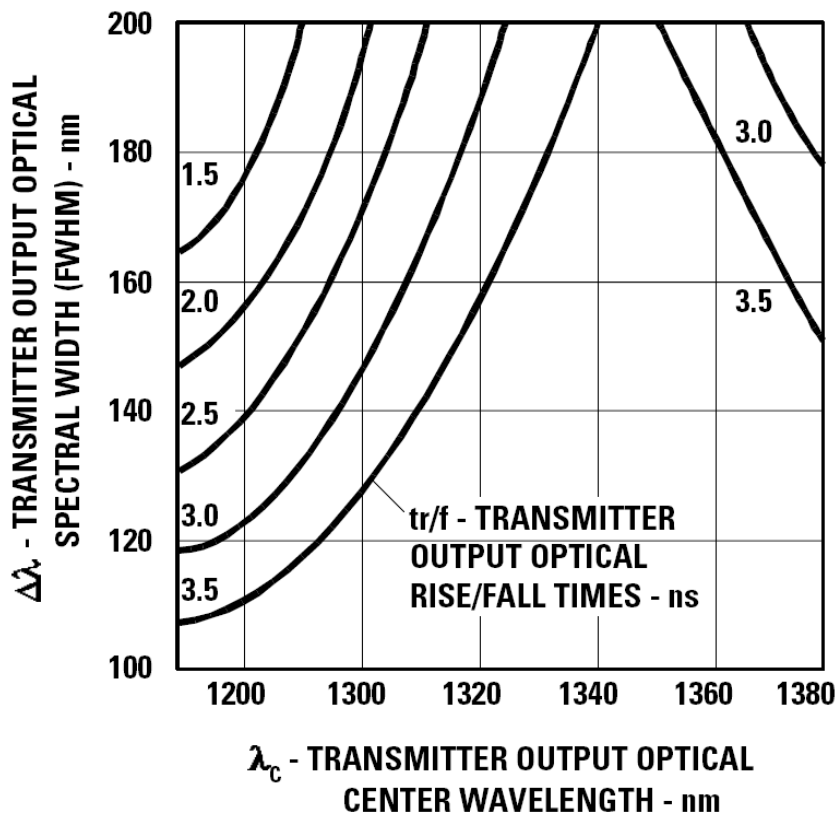


Fig 1 LED spectral width limit



RoHS compliant  
1310 nm Multi-mode Transceiver (2km)  
Small Form Pluggable (SFP), 3.3V  
155 Mbps ATM/125 Mbps Fast Ethernet

### Receiver Electro-optical Characteristics

$V_{CC} = 3.1 \text{ V to } 3.5 \text{ V}$ ,  $T_C = -10^\circ \text{ C to } 70^\circ \text{ C} (-40^\circ \text{ C to } 85^\circ \text{ C})$


PARAMETER	SYMBOL	MIN	TYP.	MAX	UNITS	NOTE
Data Rate	$B$	10	155	200	Mb/s	
Optical Input Power -maximum	$P_{IN}$	-8	---	---	dBm	Note 1
Optical Input Power -minimum (Sensitivity)	$P_{IN}$	---	---	-31	dBm	Note 1
Operating Center Wavelength	$\lambda_C$	1260	---	1600	nm	
Data Output Rise, Fall Time (10%~90%)	$T_{r,f}$	---	1	2	ns	
Loss of Signal-Asserted	$P_A$	---	---	-32	dBm	Average
Loss of Signal-Deasserted	$P_D$	-47	---	---	dBm	Average
Loss of Signal-Hysteresis	$P_A - P_D$	1.0	---	---	dB	
Differential Output Voltage	$V_{DIFF}$	0.5	---	1.8	V	
Receiver Loss of Signal Output Voltage-Low	$RX\_LOS_L$	0	---	0.5	V	
Receiver Loss of Signal Output Voltage-High	$RX\_LOS_H$	2.4	---	$V_{CC}$	V	

Note 1: The input data is at 155.52 Mbps,  $2^{23}-1$  PRBS data pattern with 72 "1"s and 72 "0"s inserted per the ITU-T recommendation G.958 Appendix 1. The receiver is guaranteed to provide output data with Bit Error Rate (BER) better than or equal to  $1 \times 10^{-10}$ .



**RoHS compliant**  
**1310 nm Multi-mode Transceiver (2km)**  
**Small Form Pluggable (SFP), 3.3V**  
**155 Mbps ATM/125 Mbps Fast Ethernet**

**Block Diagram of Transceiver**

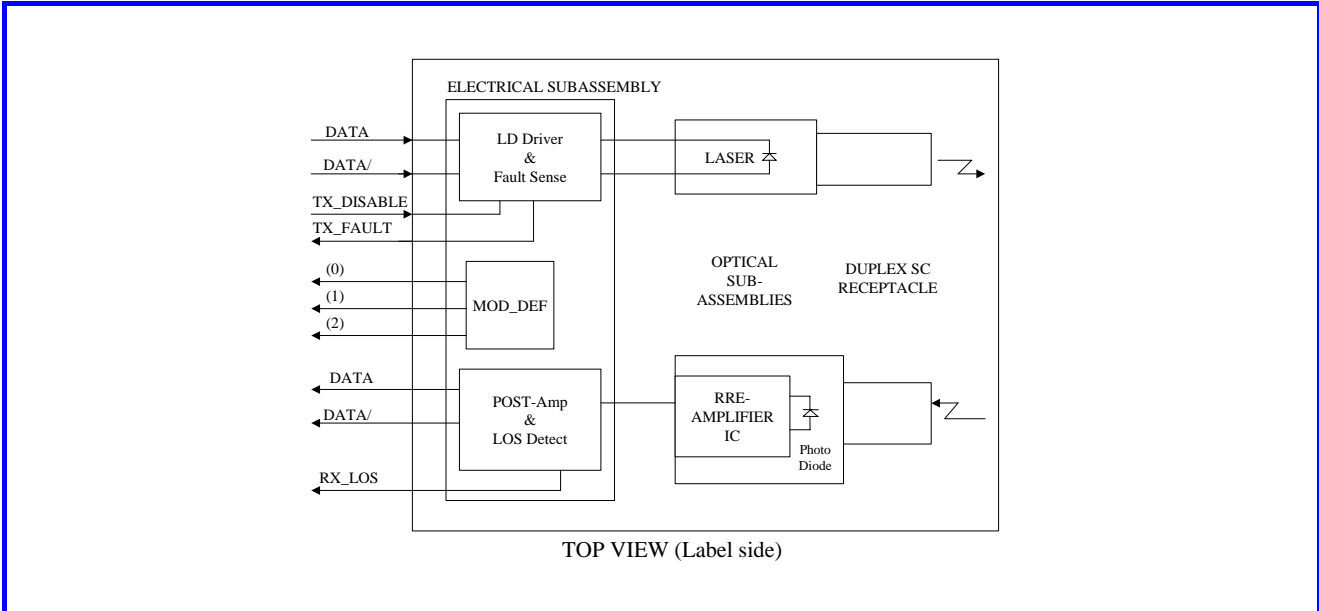

**Transmitter Section**

The transmitter section consists of a 1310 nm LED in an eye safe optical subassembly (OSA) which mates to the fiber cable. The laser OSA is driven by a LD driver IC which converts differential input LVPECL logic signals into an analog laser driving current.

**TX\_DISABLE**

The TX\_DISABLE signal is high (TTL logic “1”) to turn off the laser output. The laser will turn on when TX\_DISABLE is low (TTL logic “0”).

**Receiver Section**

The receiver utilizes an InGaAs PIN photodiode mounted together with a trans-impedance preamplifier IC in an OSA. This OSA is connected to a circuit providing post-amplification quantization, and optical signal detection.


**Receive Loss (RX\_LOS)**

The RX\_LOS is high (logic “1”) when there is no incoming light from the companion transceiver. This signal is normally used by the system for the diagnostic purpose. The signal is operated in TTL level.



RoHS compliant  
1310 nm Multi-mode Transceiver (2km)  
Small Form Pluggable (SFP), 3.3V  
155 Mbps ATM/125 Mbps Fast Ethernet

### Dimensions


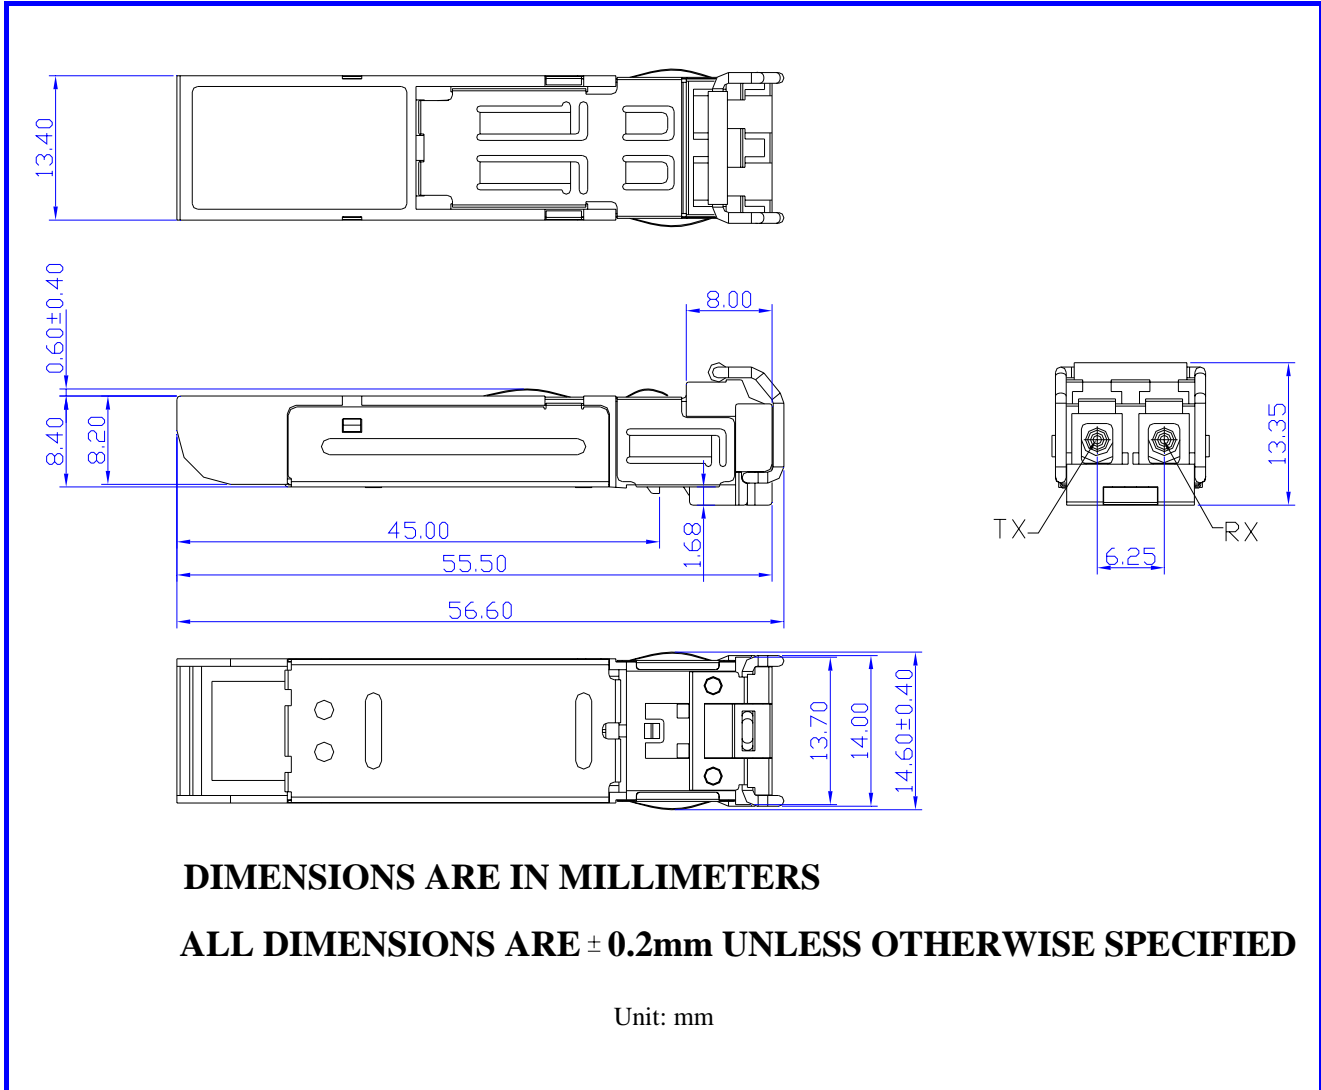


**DIMENSIONS ARE IN MILLIMETERS**

**ALL DIMENSIONS ARE ± 0.2mm UNLESS OTHERWISE SPECIFIED**

Unit: mm

SFP host board mechanical layout

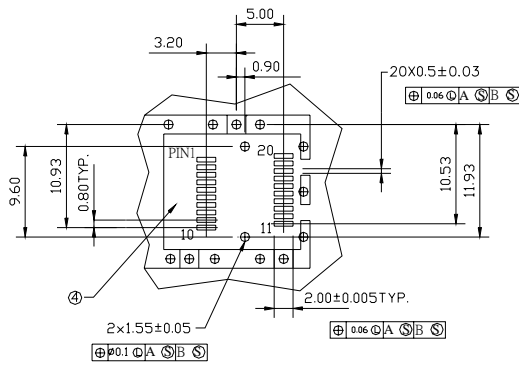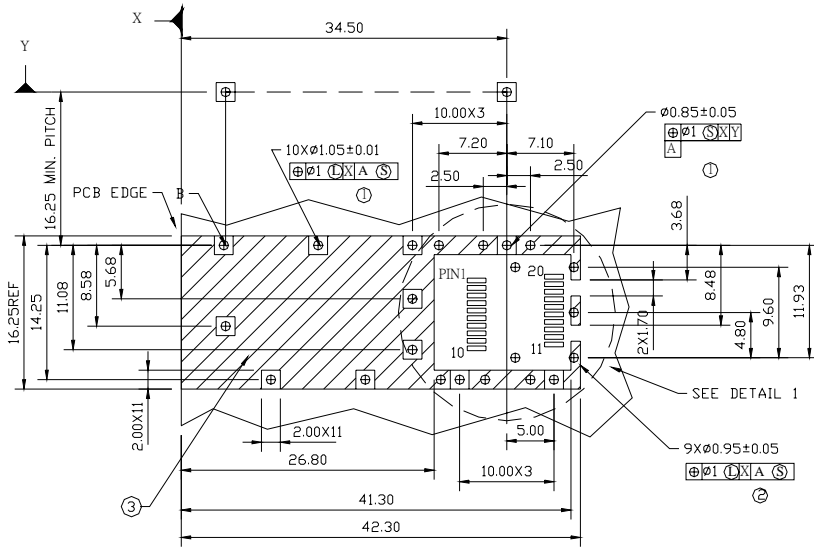

DETAIL 1

LEGEND

- 1.PADS AND VIAS ARE CHASSIS GROUND
- 2.THROUGH HOLES, PLATING OPTIONAL
- 3.HATCHED AREA DENOTES COMPONENT AND TRACE KEEPOUT(EXCEPT CHASSIS GROUND)
- 4.AREA DENOTES COMPONENT KEEPOUT (TRACES ALLOWED)


DIMENSIONS ARE IN MILLIMETERS

Unit: mm



**RoHS compliant**  
**1310 nm Multi-mode Transceiver (2km)**  
**Small Form Pluggable (SFP), 3.3V**  
**155 Mbps ATM/125 Mbps Fast Ethernet**

**Assembly drawing**

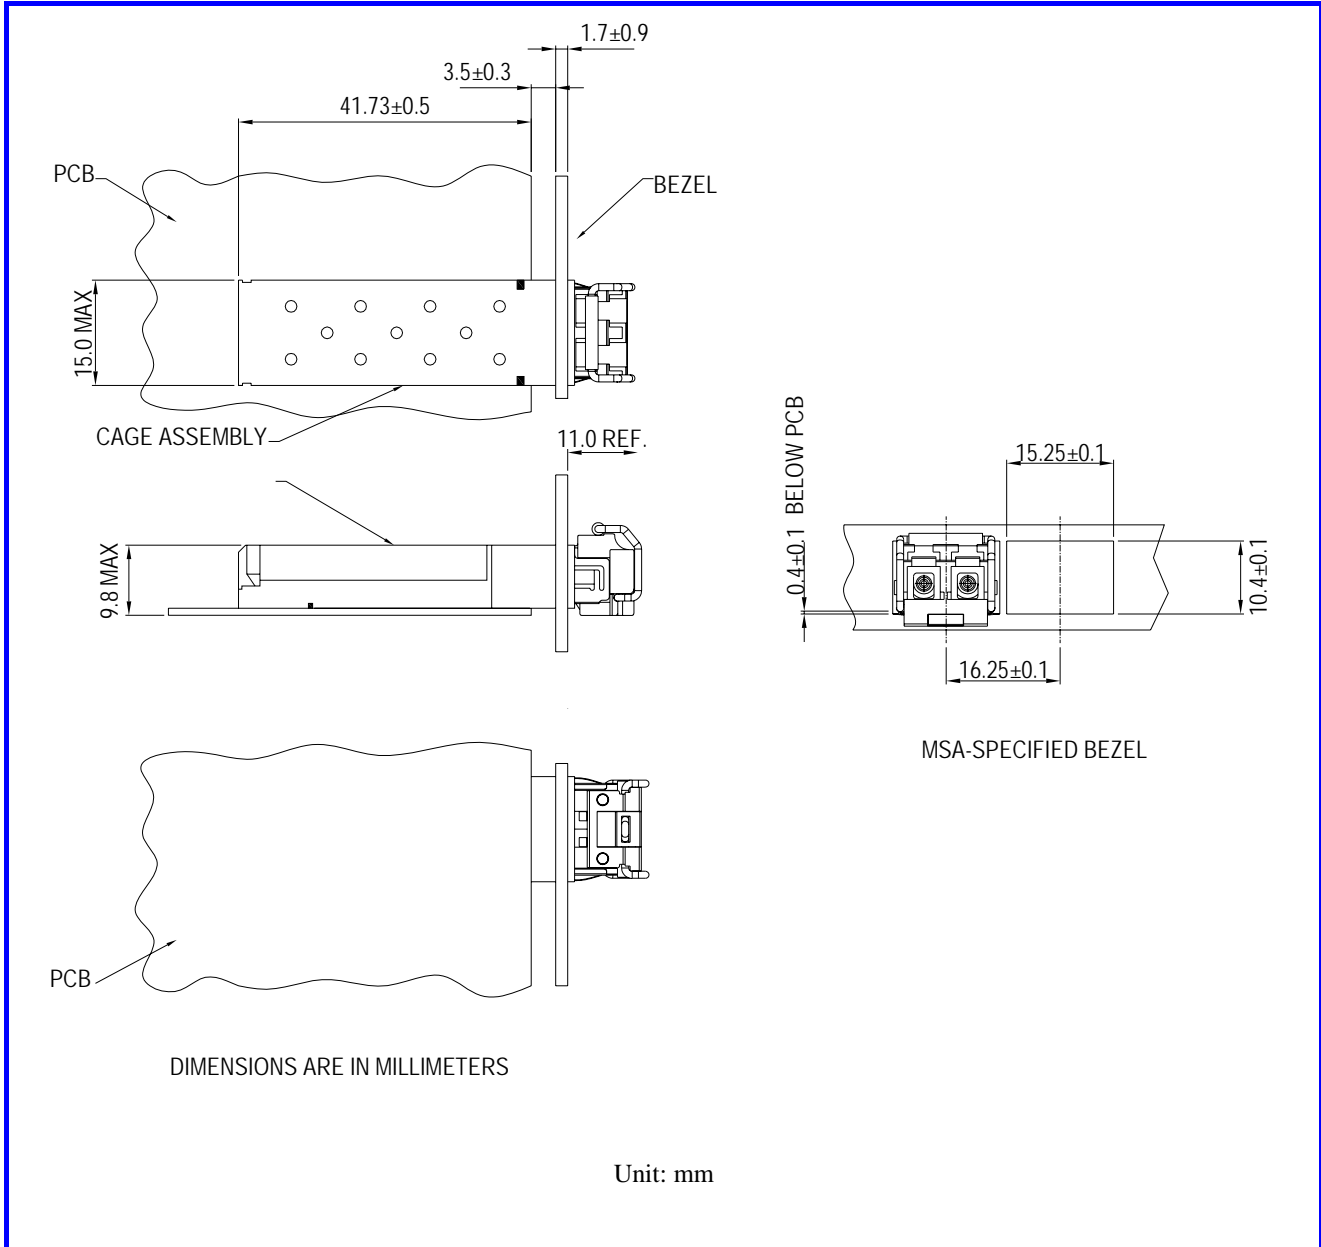






**RoHS compliant**  
**1310 nm Multi-mode Transceiver (2km)**  
**Small Form Pluggable (SFP), 3.3V**  
**155 Mbps ATM/125 Mbps Fast Ethernet**

**Pin Assignment**

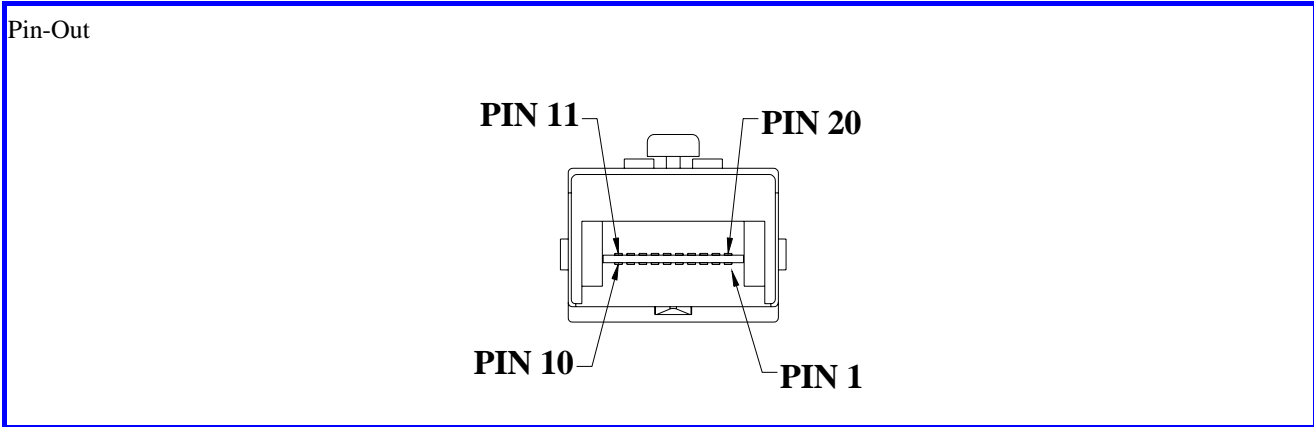

Pin	Signal Name	Description
1	$T_{GND}$	Transmit Ground
2	$TX\_FAULT$	Transmit Fault
3	$TX\_DISABLE$	Transmit Disable
4	$MOD\_DEF (2)$	SDA Serial Data Signal
5	$MOD\_DEF (1)$	SCL Serial Clock Signal
6	$MOD\_DEF (0)$	TTL Low
7	$RATE\_SELECT$	Open Circuit
8	$RX\_LOS$	Receiver Loss of Signal, TTL High, open collector
9	$R_{GND}$	Receiver Ground
10	$R_{GND}$	Receiver Ground
11	$R_{GND}$	Receiver Ground
12	$RX-$	Receive Data Bar, Differential PECL, ac coupled
13	$RX+$	Receive Data, Differential PECL, ac coupled
14	$R_{GND}$	Receiver Ground
15	$V_{CCR}$	Receiver Power Supply
16	$V_{CCT}$	Transmitter Power Supply
17	$T_{GND}$	Transmitter Ground
18	$TX+$	Transmit Data, Differential PCEL, ac coupled
19	$TX-$	Transmit Data Bar, Differential PCEL, ac coupled
20	$T_{GND}$	Transmitter Ground



**RoHS compliant**  
**1310 nm Multi-mode Transceiver (2km)**  
**Small Form Pluggable (SFP), 3.3V**  
**155 Mbps ATM/125 Mbps Fast Ethernet**

---

### Eye Safety Mark

The LM3 series Multi-mode transceiver is a class 1 LED product. It complies with EN 60825-1 and FDA 21 CFR 1040.10 and 1040.11. In order to meet laser safety requirements the transceiver shall be operated within the Absolute Maximum Ratings.

**Caution**

**All adjustments have been done at the factory before the shipment of the devices. No maintenance and user serviceable part is required. Tampering with and modifying the performance of the device will result in voided product warranty.**

Note : All information contained in this document is subject to change without notice.