

MODEL NUMBER  
ATT-0550-XX-35M-02


NOTES:

- 1.0 SPECIFICATIONS:  
 1.1 FREQUENCY RANGE: DC to 26.5 GHz  
 1.2 ATTENUATION ACCURACY:  
     0dB           +0.5dB  
   0.5-6.5dB     ±0.5dB  
   7-20dB        ±0.7dB  
   21-40dB       ±1.5dB  
 1.3 MAXIMUM VSWR: 1.07 + 0.015 f (GHz)  
 1.4 MAXIMUM INPUT POWER: 2 WATTS AVG.  
     AT +25°C DERATED LINEARLY TO 0.5  
     WATTS AT +125°C  
 1.5 OPERATING TEMP. RANGE: -65°C to +125°C

2 MARKING

2.1 MARK UNIT AS SHOWN  
 (REF.: INK-06747-27-XX)

3.0 DIMENSIONS IN PARENTHESIS ARE  
 IN MILLIMETERS

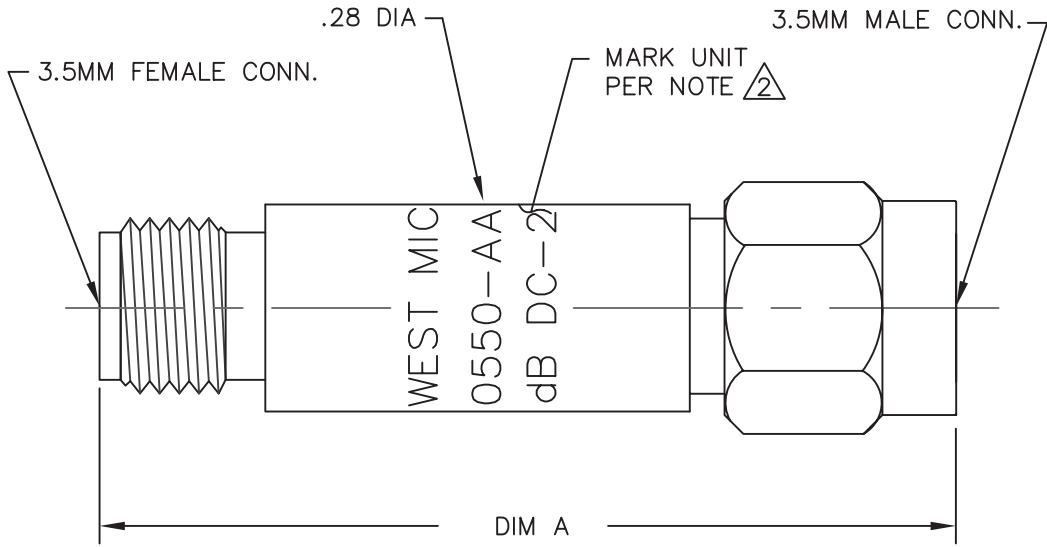


ATTENUATION VALUE	DIM A
0 - 29dB	1.36 (34.5)
30 - 40dB	1.47 (37.3)

WAS DWG. #: 06608-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/26/86
A	ECR 4550	5/27/86
B	ECR 4946	11/4/86
C	ECR 5703	11/5/87
D	ECR 5734	11/30/87
E	ECR 6545	8/1/89
F	ECR 6933	1/23/90
G	ECR 7143	2/6/90
H	ECR 7564	7/25/90
I	ECN 10814	7/23/91
J	ECN 11089	10/22/91
K	ECN 13321	3/14/94
L	ECN 15336	6/12/96
M	ECN 18722	9/9/02

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions.  
 UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  
 3 PLACE DECIMALS ±.005  
 2 PLACE DECIMALS ±.02  
 FRACTIONS ±1/64  
 PARALLELITY: T.I.R. \_\_\_\_\_  
 FLATNESS: T.I.R. \_\_\_\_\_  
 CONCENTRICITY: T.I.R. \_\_\_\_\_  
 ANGLES AND PERPENDICULARITY: ±1'

CAGE CODE <b>34078</b>		<b>MIDWEST MICROWAVE</b>	
		TITLE ATTENUATOR OUTLINE DRAWING	
		DRAWING NUMBER ATT-0550-XX-35M-02-01	
DRAWN/DATE C.RICKARD 7/23/91	ENG./DATE G.KOZAK 7/29/91	REV. M	
CHECKED/DATE A.BEATTY 7/29/91	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1