
THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

© 2005, Projects Unlimited Inc.

SPECIFICATIONS

REVISIONS				
LTR	DESCRIPTION	DATE	APPROVED	
-	RELEASED FROM ENGINEERING	5/17/06		

PARAMETERS	VALUES	UNITS
RATED VOLTAGE (SQUARE WAVE)	1.5	Vp-p
OPERATING VOLTAGE RANGE	1 ~ 3	Vp-p
RATED CURRENT (MAX)	40	mΑ
COIL RESISTANCE	15±2.3	ОНМ
MINIMUM SPL @ 10 CM	80	dBA
RESONANT FREQUENCY	2400±200	Hz
OPERATING TEMPERATURE	-40 ~ +85	ů
STORAGE TEMPERATURE	-40 ~ +85	Ç
HOUSING MATERIAL	PPS	_
TERMINAL MATERIAL	GOLD PLATED BRASS	-
WEIGHT	1.6	grams

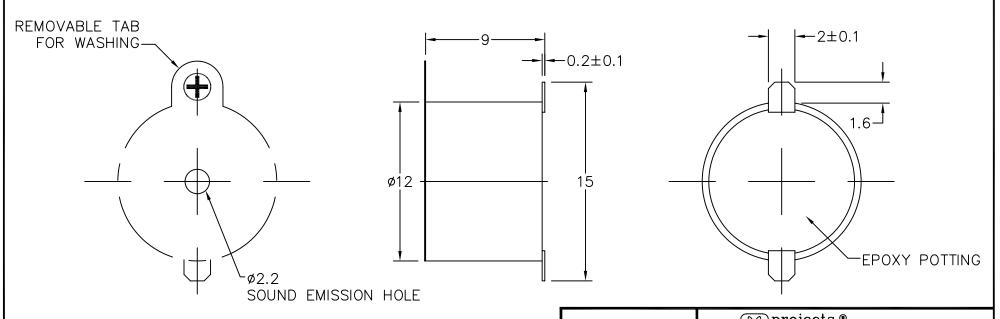

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

J.D. CHECKED E.P. APPROVED SMT-1224-TW-R.DWG

projects ® unlimited UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3'. Dayton , Ohio TRANSDUCER APPROVALS DATE 5/06 DRAWING NO. SIZE 5/06 SMT-1224-TW-R B.R. 5/06 SHEET 1 OF DO NOT SCALE DRAWING SCALE: N.T.S.